




SECTIONAL DIRECTIONAL CONTROL VALVES

Ref. DTS25060

DT

Open Circuit 250l/min

Main Dimensions

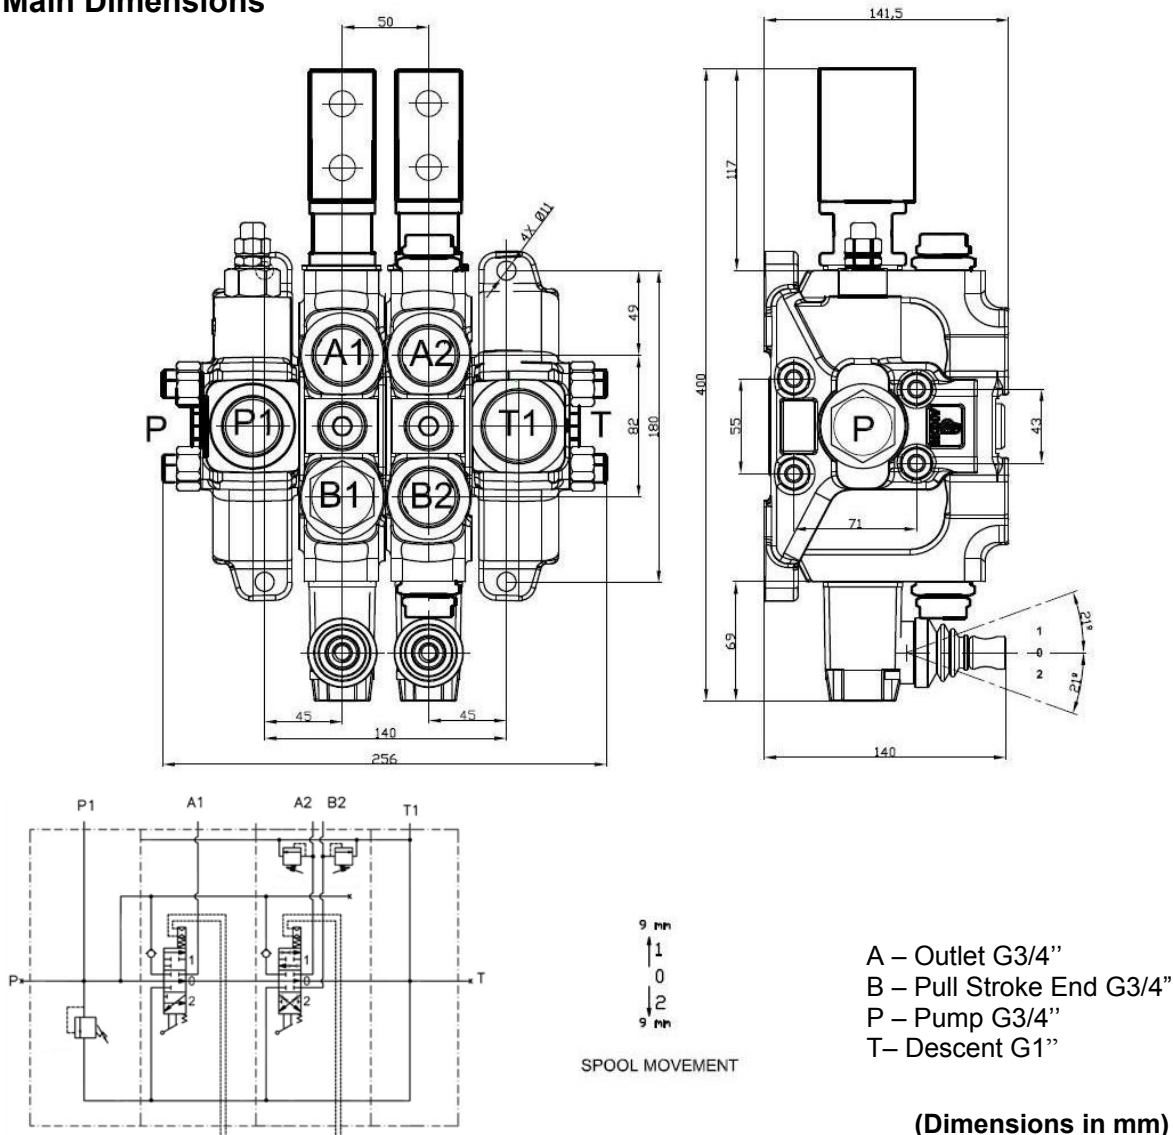

- High strength cast iron
- Hard chrome plated interchangeable
- Steel spring caps
- Aluminium lever caps
- NBR seals

- Parallel circuit
- Adjustable main relief valve
- Load hold check valve in each section
- Double action

Main Data

Operating pressure (bar)	up to 320
A1 Flow rate (l/min)	250
A2 / B2 Flow rate (l/min)	60
Weight (kg)	21,8

ABER is constantly engaged in improving its products and, therefore, reserves itself the right to modify without any further notice the characteristics shown



Rua Francisco de Almeida, N° 30 – Vila Nova da Telha – 4470 MAIA - Portugal
 Telephone: +351.22.9438070 Fax: +351.22.9420823 e-mail: aber@aber.pt <http://www.aber.pt>